

# BEVEL SCAN

SERIMAX'S ACCURATE AND RAPID MEASUREMENT TOOL FOR PIPE END DIMENSIONS OR BEVELS WITH PIPE SORTING SOFTWARE. THE EQUIPMENT IS SUITABLE FOR CRA AND SCR PROJECTS.



## MEASURING YOUR PIPE ENDS TO FACILITATE FIT-UP AND SORTING

- Improve weld quality
- Increase productivity
- Optimise HiLo
- Ensures integrity of welds
- Minimise downtimes

# BEVELSCAN

## Equipment Description Range

## Operating Capabilities

## Available Features

## Analysis and Reporting

- . Full bevel assessment with Go/ No Go analysis within 60s (not on the critical path)
- . In the following 30s fit-up data available in combination with Cleverscan, a trade-off fit-up can be obtained through best fit features.
- . Applications : all kind of pipeline applications

- . Diameters: 5" to 56"
- . Internal diameter range : 130 – up to 1400mm
- . Wall thickness range : 6 - 45mm (Beyond 50mm please contact Serimax team)

- . Special software allows to optimize inner HiLo
- . 2D/3D laser scanner precision

- . Autonomous power source (battery operated)
- . Wireless control
- . Portable and easy to use


### Software Features:

- Integrated software for link between data acquisition & analysis phases
- Fully integrated with CleverWeld data traceability & reporting system



www.serimax.com

SERIMAX HOLDINGS  
Welding Technology Centre (WTC)  
346 Rue de la Belle Étoile  
95926 Roissy-en-France  
Serimax.com / +33 1 56 48 90 50  
Contact Details: contact@serimax.com

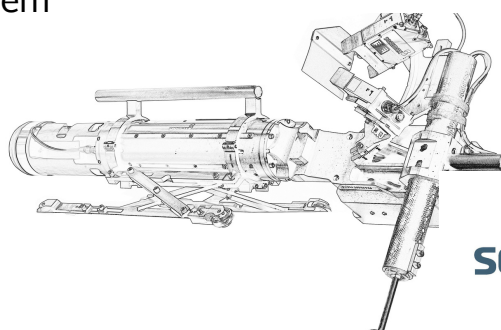

**SERIMAX**